


第 3 角法

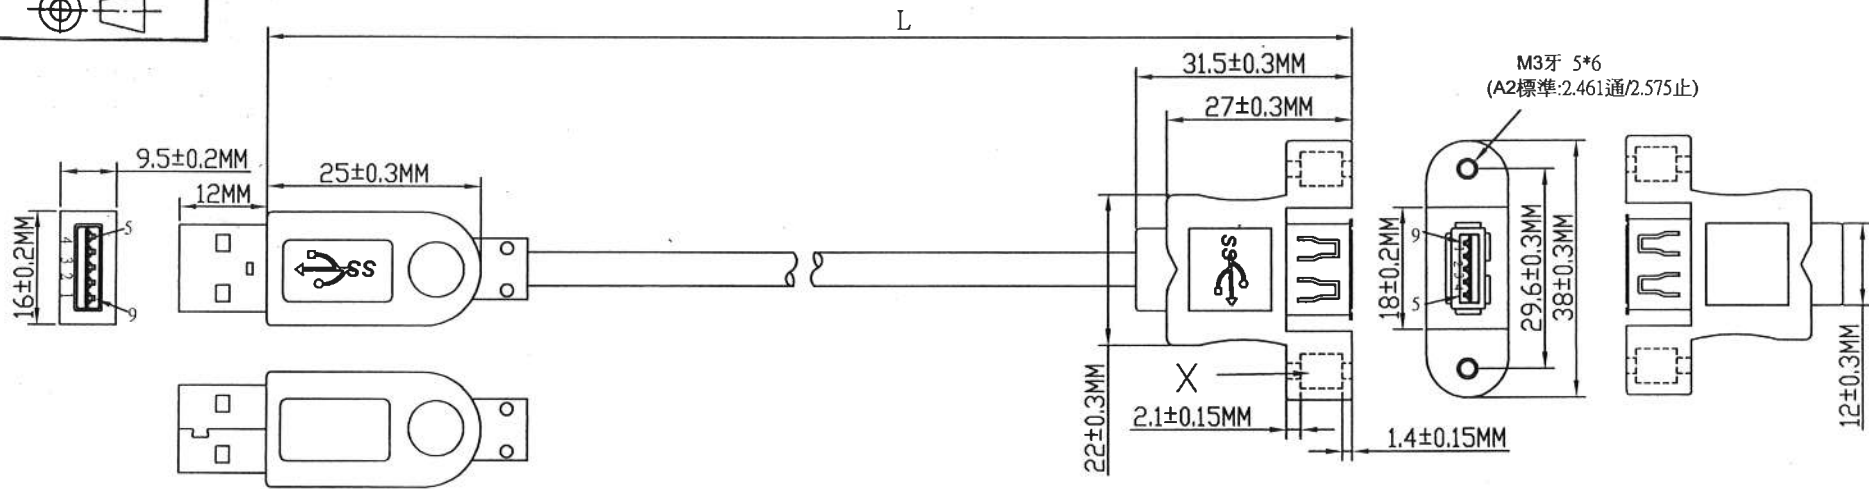

USB 3.0 AM(NICKEL PLATED)
BLUE MOLDING(45P)

ITEM NO.	Length	Tolerance
	500mm	20mm
	1000mm	30mm


USB3.0 AF(NICKEL PLATED)
BLUE MOLDING(45P)

NOTE:

- CABLE:UL2725 3.0VER. [(30#*1P+D+AL+M)*2+(28#*1P+24#*2C)]+F+AL+B, OD=5.5mm,BLUE COLOR,PVC JACKET.(銅編,64編)
- LENGTH:500/1000mm
- CONNECTOR:USB AM*1PCS,USB AF*1PCS(BLUE INSULATOR,NICKEL PLATED,3.0VER.)
- MOLD:BLUE MOLDING.
- CONTACTS:

USB AM	1	2	3	4	5	6	7	7	8	9	S
USB AF	1	2	3	4	5	6	7	7	8	9	S
	RED	WHITE	GREEN	BLACK	BLUE	YELLOW	GND	GND	PURPLE	ORANGE	BRAID
		TP			TP				TP		

- OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.

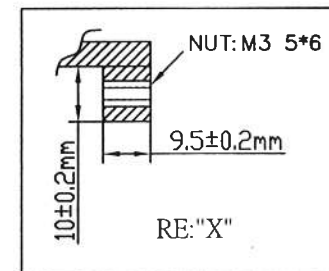

ROHS COMPLIANT

△	・			承認 APPR. BY	検認 INSP. BY	照査 COLLA. BY	照査 MODEL	照査 MATERIAL		
△	・						照査 PART NO.	照査 QTY.	/	照査 SCALE
△	・			検図 CHJK. BY	・	・	照査 PART NAME			
△	・			設計 DES. BY	・	・				
	年月日 DATA	訂正事項 DESCRIPTION OF REVISIONS	署名 SIGN	製図 DRAWN BY	2010.11.09	(石本)	千年エンジニアリング株式会社			